

MODEL NAME


**EELS 30W ML FL with SPD**

Characteristic		Parameters	
MECHANICAL SPECIFICATION	Fixture Housing	Fitting housing in Aluminium Die Casting	
	Fixture Dimension	255 mm X 183 mm X 160 mm	
	Diffuser Closure	Toughened Glass	
	Weight	2.2 Kg	
	IP Standard	IP65	
LUMINARIES	Total Wattage	30 Watts	
	Initial Lumen	3600 Lumen	
	Luminaire Efficacy (Lm/Watt)	120 Lm/W	
	Life	50,000 Burning Hours	
	Starting Time	Rapid (0.2 sec)	
	Operating Temperature	From -20° to +60° C	
LED DRIVER	Type of Driver	Constant Current (CC)	
	Input Voltage Range	150 VAC ~ 265 VAC	
	Frequency Range	50 Hz	
	Power factor	> 0.98	
	Total Harmonic Distortion	< 10 %	
	Surge Protection	3.75 Kv	
	Protection	Surge Protection, Output short circuit protection, Over Load Protection, Over Voltage Protection	
LED LAMP	Light Source	SMD LED	
	Lamp Efficacy	> 150 Lm/W	
	Colour Temperature	3000 K - 6500 K	
	CRI	> 70	
	Certification/Report	LM80 / Photo Bio.Test	
	Identification Feature	Unique Serial No.Printed on each Lamp	
OPTICS	Beam Angle	60°/ 90°	
	Optics Type	N.A.	
MOC of Optics	N.A.		

PRODUCT IMAGE





SCHEMATIC IMAGE




THERMAL IMAGE



LED SPECTRUM

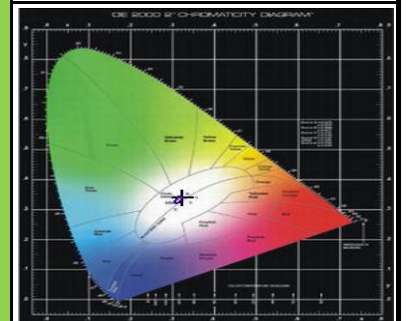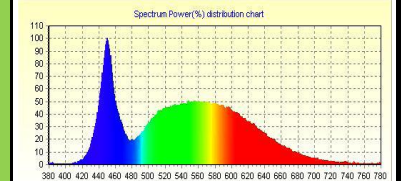

LIGHT DISTRIBUTION

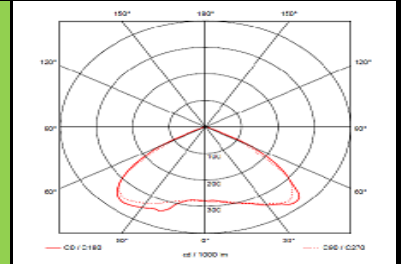

APPLICATION

Small/Medium Open Areas, Architectural & Building Façade Lighting, Security Lighting, Lighting of Industrial & External Storage Areas, Industrial Outdoor Areas, Ports & Container Terminals, etc.

