
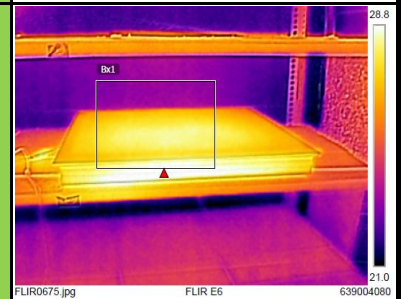
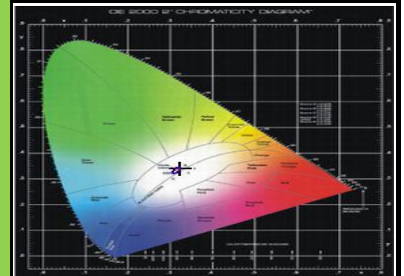
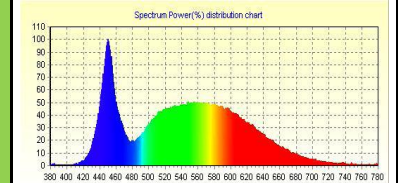


MODEL NAME
EELS 40W 2X2 Recess PNL

Characteristic		Parameters	
MECHANICAL SPECIFICATION	Fixture Housing	Fitting Housing in Sheet Steel with Powder Coating	
	Fixture Dimension	595 mm X 595 mm X 95 mm	
	Diffuser Closure	Milky Diffuser	
	Weight	3.5 Kg	
	IP Standard	IP40	
LUMINARIES	Total Wattage	40 Watts	
	Initial Lumen	4400 Lumen	
	Luminaire Efficacy (Lm/Watt)	110 Lm/W	
	Life	50,000 Burning Hours	
	Starting Time	Rapid (0.2 sec)	
	Operating Temperature	From 0° to +60° C	
LED DRIVER	Type of Driver	Constant Current (CC)	
	Input Voltage Range	150 VAC ~ 265 VAC	
	Frequency Range	50 Hz	
	Power factor	> 0.98	
	Total Harmonic Distortion	< 10 %	
	Surge Protection	3.75 Kv	
	Protection	Surge Protection, Output Short Circuit Protection, Over Load Protection, Over Voltage Protection	
LED LAMP	Light Source	SMD LED	
	Lamp Efficacy	> 150 Lm/W	
	Colour Temperature	3000 K - 6500 K	
	CRI	> 80	
	Certification/Report	LM80 / Photo Bio.Test	
	Identification Feature	Unique Serial No. Printed on each Lamp	
Beam Angle	120°		
OPTICS	Optics Type	Polystyrene Cover for Glare-Free Wide Light Distribution	
	MOC of Optics	Polystyrene Cover	
APPLICATION	The luminaire can be used for lighting in Offices, Commercial Showrooms, Hotels, Institutes etc		

PRODUCT IMAGE

SCHEMATIC IMAGE

THERMAL IMAGE

LED SPECTRUM

LIGHT DISTRIBUTION
